

# Black Pearl Specifications

## Black Pearl Shower Tray

- One-piece pre moulded reinforced fibreglass construction for durable performance
- Structurally strong across entire base and outlet – will not deflect or compress
- Built-in outflow gradient ensures optimum water flow to outlet. Minimum 12mm fall to outlet
- Wall junction upstand 40mm high
- Base height 26mm from floor to top of base.
- Waste outlet is located at rear on most sizes, 175mm from rear wall. Some sizes have centre-located waste option
- Standard sizing only
- Weight: 14kg/m<sup>2</sup>
- 7 years leak-free and durability warranty

## Shower Wall

**Option 1: Acrylic Wall Liner** (to achieve non-tiled pure white look)

- 1930mm high acrylic liner (supplied)
- 2mm Senosan Acrylic

**Option 2: Waterproofing Wall Membrane** (for tiled walls)

- Atlantis self-adhesive sheet membrane is supplied standard.
- Optimum controlled 1mm thickness.
- Membrane immediately ready for tiling.
- BRANZ-appraisal certificate No.461 (2005)
- Can be used with a wide range of recommended tile adhesives (not supplied).
- Also included: self-adhesive corner strip, zip tape for overlaps, bondbreaker tape.
- Wall channels are sealed to the membrane.
- 15-year leak-free manufacturer's warranty

**Option 3: Alternative Waterproofing Method** (to achieve acrylic and tiled wall look)

- Alternative sheet or liquid-based waterproofing membranes may be used with the Black Pearl system in accordance with manufacturer's instructions and subject to their warranty.

- Application of waterproofing method must be undertaken by an approved applicator.
- Membrane tape supplied for connection between base and wallboard.

## Screens

Fully-frameless Screens

- Specially manufactured as part of total shower system
- 8mm toughened safety glass marked with NZ Safety Standard on top edge of screen.
- NZ Building Code compliant (AS/NZS 2208-96)
- 1930mm high doors and returns
- Doors can be hinged left or right
- Glass top brace supplied for most systems. (No brace needed for smaller 3-walled showers).
- 5 years manufacturer's warranty.

## Waste Fitting

- Waste Fitting 40mm EasyClean waste with side outlet and chrome over brass lid.
- Optional 40mm high-flow waste outlet with S-trap available on request.
- 5 years manufacturer's warranty.

## Hardware


- Polished stainless steel handles supplied. L handle standard. Upgrades available.
- Adjustable bracing system – catering for uneven walls, incorporating up to 10mm installation tolerance
- Chromed, solid brass self-centering hinges
- 2 Shelves and 1 footrest with each shower in 10mm toughened glass

## Installation

Atlantis recommends installation of Black Pearl showers is undertaken by an approved Atlantis installer. See website or call 0800 428 526 for more details.



option one: with acrylic liner

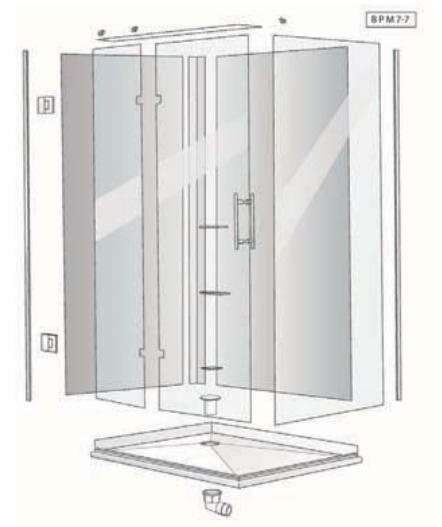

option two: with self-adhesive sheet membrane (for tiled wall)

