



CUSTOM SHAPE & NON-STANDARD SIZE SHOWERS

Request for Quote

FLEXIBLE SHAPE
FLEXIBLE SIZE
FLEXIBLE WASTE POSITION
FLEXIBLE SCREENS

Date:
Merchant:
Branch:
Contact Name:
Fax number:
Quote by:
Product by:

Your Reference:

AS PER DRAWING BELOW: Please show all wall positions and preferred door or panel position.

Please specify to 50mm increment if possible. Any size between 850mm and 2000mm.

BASE SIZE	Specify to 50mm increments	<input checked="" type="checkbox"/>
BASE TYPE	Standard Hob (50mm high x 80mm wide)	
	Slim Hob (50mm high x 30mm wide)	
	Level entry (stepless) (for timber floor only)	
WASTE POSITION	Centre (50mm EasyClean)	
	Off-centre (50mm EasyClean) show position in drawing	
TILED WALLS	2 wall	
	3 wall	
	2 ½ wall	
	3 ½ wall	
SHAPE	Square	
	Rectangle	
	Angle Front	
	Special shape (as shown)	
GLASS SCREENS	8mm fully closed in	
	8mm Fixed Panel only	
	Framed glass	
WALL MEMBRANE	Atlantis AFM-WM self-adhesive membrane	
TILE ADHESIVE KIT	Mapei Kerabond and Isolastic	
QUANTITY		
SPECIAL INSTRUCTIONS/ ACCESSORIES		

Fax to 0800 575 585

All Atlantis custom showers are quoted with the **Freeform EasyTile™** tiling base and 50mm EasyClean (adjustable waste) as standard, and are non-returnable once ordered. 25 year leak-free warranty applies on the base. We recommend installation by an approved Atlantis installer.

Freeform EasyTile™ Specification Sheet

Flexible size base - for most cost-effective pricing, please specify to 50mm increment (between 850 and 2000mm)

Flexible shape - square, rectangle, angled front, curved front, custom-shape

Flexible waste position - Waste centre can be placed anywhere to 250mm of base edge

Flexible screen options - please specify location of door; left or right-hinged. Walk-in (panel only) options also available.

SHOWER BASE

- One-piece pre-formed fibreglass (EasyTile™) construction for durable performance.
- Built-in outflow gradient ensures optimum water flow to outlet.
- Supplied with Base Interlayer Membrane applied to base surface - ready for tiling.
- Shower hob available in 3 options: Standard: 50mm (H) x 80mm (W); Slim: 50mm (H) x 30mm (W) or Stepless (level-entry) - suitable for most floor structures. Upstand 55mm standard height.
- Weight: 14kg/m².
- 25-year leak-free warranty on shower base.

WATERPROOFING WALL MEMBRANE

- Atlantis ProtectoWrap AFM-WM self-adhesive sheet membrane is recommended and supplied standard with all systems.
- Optimum controlled 1.0mm thickness.
- BRANZ-appraisal certificate No. 461 (2005).
- Can be used with a wide range of recommended tile adhesives.
- Also included: self-adhesive corner strip, zip tape for overlaps.
- Wall channels are sealed to the membrane.

FRAMELESS SCREENS


- Specially manufactured as part of total shower system.
- Precision fit with base and wall channels.
- 8mm toughened safety glass marked with NZ Safety Standard.
- 1930mm high doors and returns.
- Doors can be hinged left or right.

WASTE FITTING

- 50mm EasyClean (adjustable) supplied as standard.

HARDWARE

- Polished chrome or stainless steel door handles supplied with all screen options.
- Adjustable bracing system - catering for uneven walls, incorporating up to 10mm installation tolerance.
- Chromed, solid brass self-centering hinges.

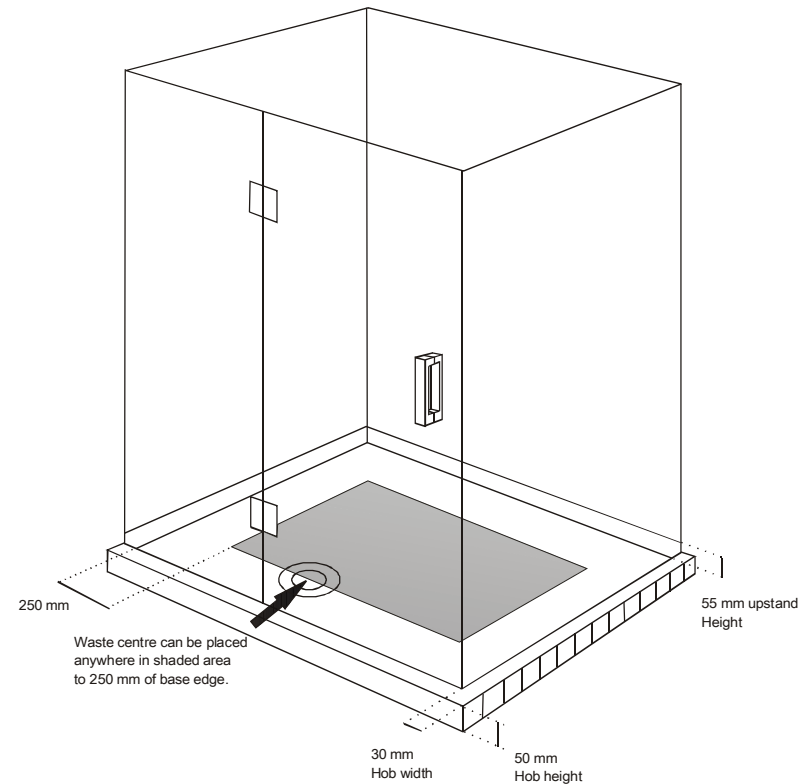

Indicative illustration of Freeform shower base & system.

WARRANTIES

Atlantis standard warranties apply to all components of this system, including the 25-year leak-free warranty on the **Freeform EasyTile™** shower base. Refer Atlantis Technical Guide for details.

Freeform EasyTile™ Perspective View of Base with Slim Hob option

